


582-e

Single Point Load Cell, Type BSP 608 Mini Load Cell

- Low Capacity Load Cell for off-center loading
- For Platform Sizes up to 15 x 15 cm
- Measuring Body made of Aluminium Alloy, with 4-wires Connecting Cable, 0.5m long
- Temperature Range -10 to +40°C
- Non-Linearity $\pm 0.02\%$
- Zero Output Tolerance $\pm 5\%$
- Nominal Output at Capacity 1.5 mV/V $\pm 10\%$
- Excitation max. 10V
- Input Resistance approx. 410 Ω
- Output Resistance approx. 350 Ω
- Insulation Resistance >5G Ω
- Safe Overload 150%
- Mechanical Failure 200%
- Environmental Protection IP65
- Simple Mounting

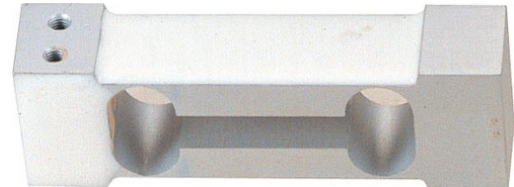

Capacities:

0.5, 1, 2, 3, 5 kg

