


583-e

Single Point Load Cell, Type BSP 628

Low Cost

- Low Profile Load Cell for off-center loading
- For Platform Sizes up to 50 x 60 cm
- Measuring Body made of Aluminium Alloy, with 4-wires Connecting Cable, 3m long
- Temperature Range -10 to +50°C
- Non-Linearity $\pm 0.02\%$
- Zero Output Tolerance $\pm 5\%$
- Nominal Output at Capacity 2 mV/V $\pm 5\%$
- Excitation max. 10V
- Input Resistance approx. 400 Ω
- Output Resistance approx. 350 Ω
- Insulation Resistance >5G Ω
- Safe Overload 150%
- Mechanical Failure 200%
- Environmental Protection IP65
- Simple Mounting

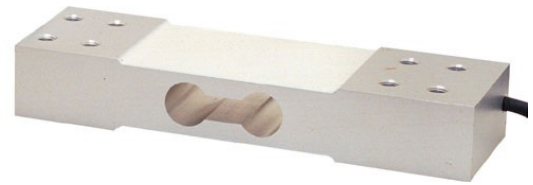

Capacities:

100, 150, 200, 300, 350 kg

