Tel. (0711) 3 45 12 00 Fax (0711) 3 45 49 30 Email: contact@gbuettner.de

PDS_646_EN

SPRINGMOUNT® Weighing Module

BS-M25G


Capacity: 1500 kg.



Characteristics:

- Elastic restraining using leaf springs (SPRINGMOUNT®-Technology)
- Optimised force transmission from head plate (with elastomer inlay) to load cell
- Load cell made of stainless steel (17-4PH)
- Sensitivity 2 mV/V
- Accuracy class 0.02%
- Environmental protection IP 65

Dimensions:

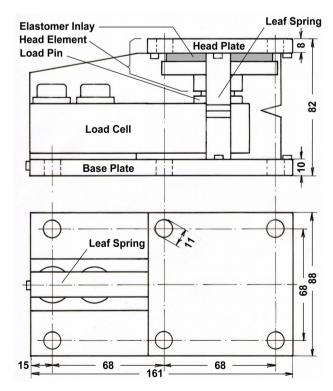

Dimensions in mm.

Cable Diameter max. 5 mm, Cable Length 5 m (4-wire).


Tel. (0711) 3 45 12 00 Fax (0711) 3 45 49 30 Email: contact@gbuettner.de

PDS_646_EN

SPRINGMOUNT® Weighing Module			BS-M25G
Technical Specifications:			Used Load Cell: BS25
Capacity	(E _{max})	[kg]	1500
Accuracy Class			0.02%
Maximum Number of Load Cell Intervals	(n Lc)		3000
Minimum Load Cell Verification Interval	(Vmin)	[% of E _{max}]	0.01
Sensitivity	(C _n)	[mV/V]	2.00 ± 0.02
Non-Linearity	(d _{lin})		≤ 0.02
Zero Balance		[% of C _n]	≤ 1
Temperature Effect on Zero Balance	(TC₀)	[%C/10K]	≤ 0.02
Temperature Effect on Sensitivity	(TCc)	[%C/10K]	≤ 0.02
Minimum Dead Load		[% of E _{max}]	0
Safe Load Limit	(Elim)	[% of E _{max}]	150
Breaking Load	(Ed)	[% of E _{max}]	300
Deflection at E _{max}		[mm]	≤ 0.90
Creep (over 30 Minutes)		[% of C _n]	≤ 0.02
Zero Return after 30 Minutes		[% of C _n]	≤ 0.02
Excitation		[V]	5 15
Input Resistance	(R _{LC})	[Ω]	410 ± 30
Output Resistance	(R оит)	[Ω]	350 ± 5
Insulation Resistance		[MΩ]	> 3000 (at 100V DC)
Nominal Temperature Range		[°C]	-10 +40
Service Temperature Range		[°C]	-20 + 65
Storage Temperature Range		[°C]	-40 + 75
Material of Load Cell			Stainless Steel (17-4PH)
Material of Other Parts		either	Stainless Steel or Galvanised Steel
Protection Class to EN 60 529			IP65

Cable/Connections:

- 4-wire cable, 5 m long;
- Cable screened, screen not connected to load cell body;
- Cable diameter approx. 5 mm;
- End of wires stripped and tinned.



Excitation +	yellow	
Excitation -	brown	
Signal +	white	
Signal -	green	

Optional Accessories:



Load Cell Junction Box, Model AK, Stainless Steel Housing IP65





Load Cell Connection Cable, 4-wire or 6-wire, screened

More Weighing Technology (e. g. load cells, weight indicators, weighing amplifiers) on www.gbuettner.de.